
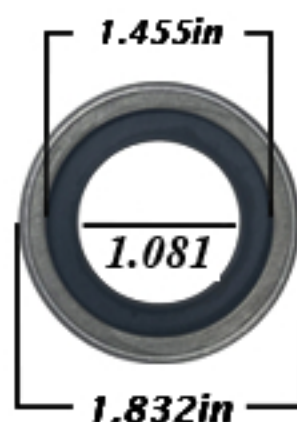


STANDARD

OVERSIZED

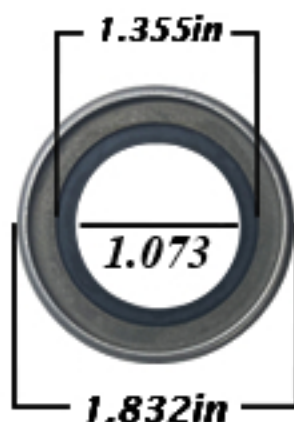

Installing Double Lip Teflon Seals can be challenging. Follow the below steps to help with the installation. Install at your own risk.

- 1) Install Seal in bearing plate.***
- 2) Apply Lithium grease to Teflon portion of the seal.***
- 3) Install rear bearing plate. Make sure to tight bolts evenly, this will press the seal on the shaft.***

NOTE: Neoprene seals install dry.



**Toll Free Tech
800.576.7661**